


Pfirst Series™ Pull-Down Kitchen Faucet

- G529-PF2B Finish(B) ☐
- G529-PF2C Finish(C) ☐
- G529-PF2S Finish(S) ☐
- G529-PF2Y Finish(Y) ☐



Specifications

Features

- 1.8 GPM Flow Rate
- Optional Deckplate Available, Order 961-250*
- 3 Function Pull-Down Sprayer (Stream, Spray, and Pause)
- Pfaster Connect™
- Forward Handle Operation
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®


Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- Cal Green Compliant
- CEC Certified
- ADA Compliant-ANSI A117.1 (Lever handles only)
- ASME A112.18.3 (Backflow Prevention)



Dimensions

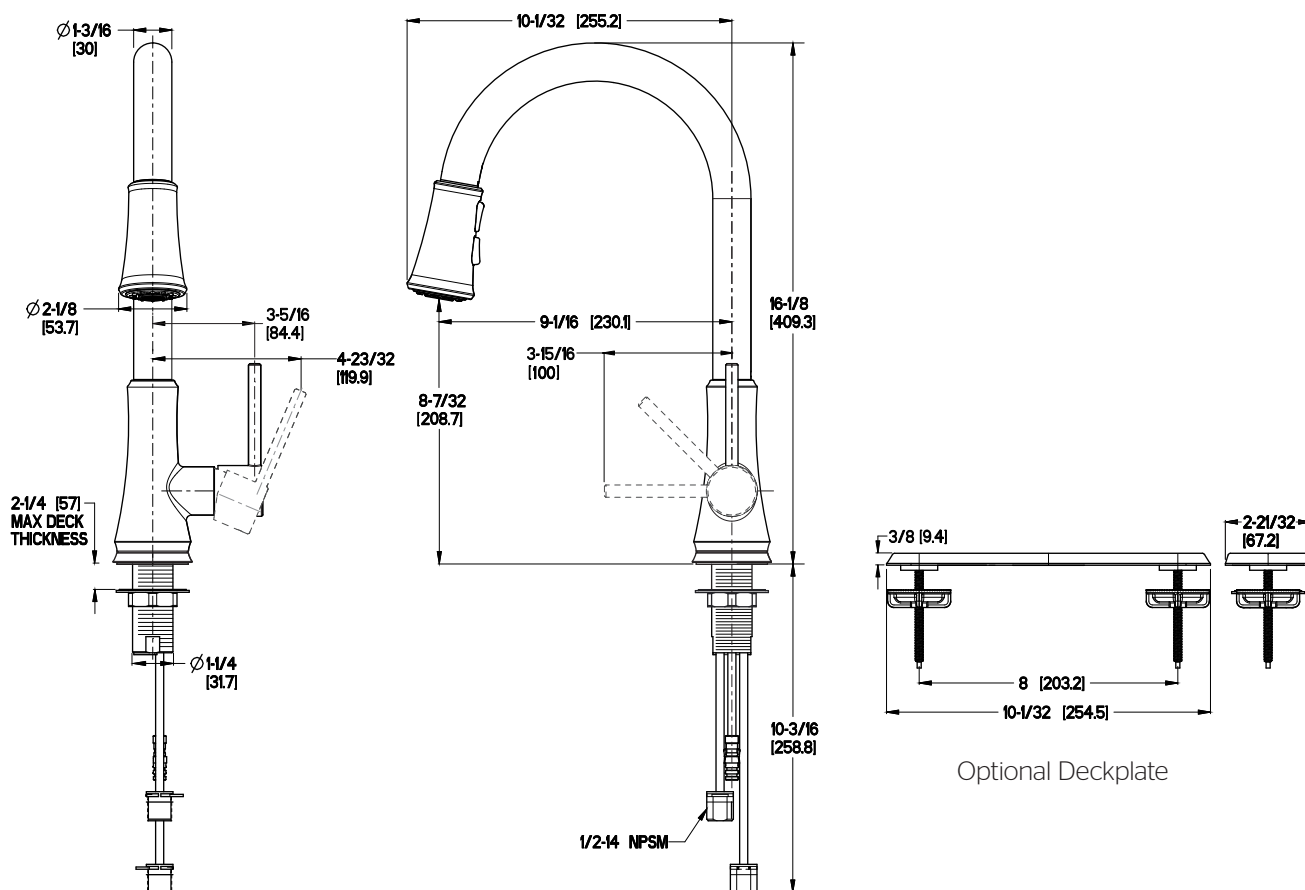

$\varnothing 1\text{-}3/8$ Min to $\varnothing 1\text{-}1/2$ Max. Deck Hole Openings