# PREMIER FAUCET SPECIFICATIONS



Model# 3585647 - Brushed Nickel

Premier Single-Handle Pull-Down Kitchen Faucet

All-metal construction with lead-free brass waterways and ABS

Switch from stream to spray or pause flow with the touch of a

Includes Snap-Connect feature for easy hose installation

Suitable for 1- or 3-hole installations (6" or 8" on-center)

30" nylon supply lines with 3/8" compression connections

### Faucet Features:

#### Page 1 of 2

Faucet Features:	
Dimensions (WxHxD)	10-5/8" x 19-3/8" x 9-7/8"
Finish	PVD Brushed Nickel
Platform	Brass
Flow Rate	1.8 GPM
Flow Restriction Type	FR (Fixed Restrictor)
Centers Holes	6" or 8" 1- or 3-Hole
Handle Screw	2.5 mm Hex Key x M5x0.8
Handle Type	Single Lever
Handle Material	Metal
Control	Ceramic Disc Cartridge
Inlet Connections	3/8" Compression
Inlet Type	30" Nylon Supply Lines
Max. Deck Thickness	2-1/4"
Deck Plate Material	Metal
Spout Reach	7-7/8"
Spray Configuration	Pull-Down Spray Head
Spray Hose	Stainless Steel Braided Hose
Optional Deck Plate	Solid 3-Hole Plate
Deck Tie-Downs	Included
Putty Plate	Included
Package Size (WxDxH)	11.02" x 27.56" x 2.76"
Package Weight	6.93 Lbs.
Case Size (WxDxH)	11.81" x 28.54" x 9.65"
Case Weight	22.70 Lbs.

#### Listings:

- IAPMO (International Association of Plumbing & Mechanical Officials)
- cUPC (Uniform Plumbing Code-US & CA)
- IAPMO-Certified Lead-Free
- DOE (Department of Energy)
- CEC (California Energy Commission)
- Commonwealth of Massachusetts

#### Complies with toxicity requirements of NSF 61-9 and CA Proposition 65 Meets lead-free requirements of California Health & Safe

Complies with requirements of ASME A112.18.1

Complies with ADA (Americans with Disabilities Act)

- Meets lead-free requirements of California Health & Safety Code 116875 (AB1953)
- Meets lead-free requirements of NSF 372
- Complies with requirements of CSA B125

# Warranty:

At a Glance:

spray head

button

**Compliance:** 

Single metal lever handle

Wear-resistant ceramic disc cartridge

Includes quick-install hose weight

Fits decks up to 2-1/4" thick

Provides CEC-compliant flow rate of 1.8 GPM

Includes color-matched optional deck plate

•

•

.

.

.

•

.

Limited Lifetime Warranty
\*Refer to Premier Faucet warranty program for further details and restrictions.


## **Optional Accessories:**

- 122007 Sink Strainer, Brushed Nickel
- 552029 Soap Dispenser, Brushed Nickel

For additional information, contact Premier Faucet at 866-745-4010 or visit our website at www.premierfaucet.com.

Revision: 9/19/2018 Dimensions and specifications are subject to change. All dimensions are nominal. Faucet version 0

Page 2 of 2

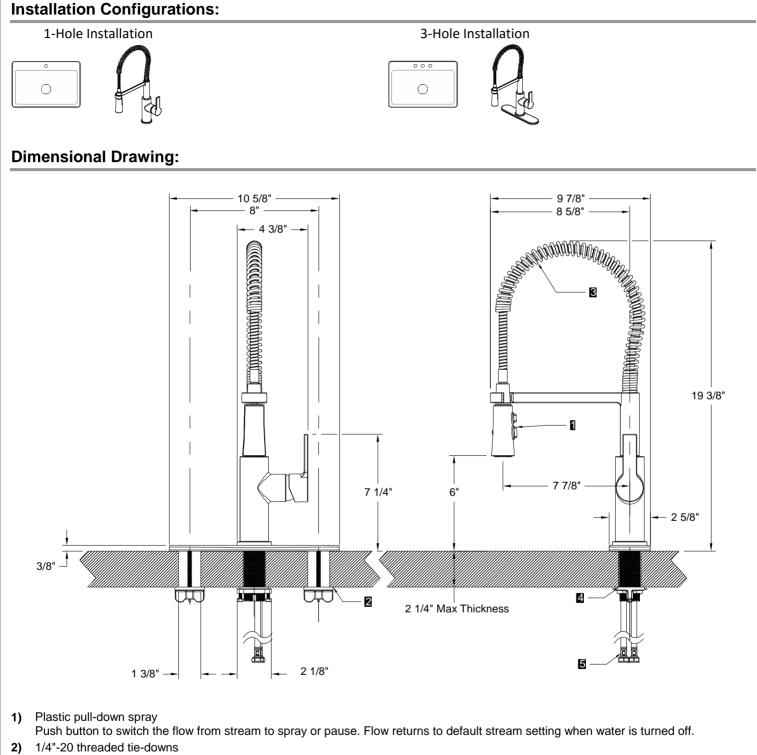

- Plastic wing nuts for easy, tool-free installation (included)
- 3) Stainless steel spring hose guide
- 4) Fits standard hole openings 1-1/4" to 1-1/2" in diameter
- 5) 30" nylon supply lines with 3/8" compression connections for easy installation (28" usable length)

For additional information, contact Premier Faucet at 866-745-4010 or visit our website at www.premierfaucet.com.

Λ