


Fiore™ Technical Specifications

		Soaking Bath Models		Pure Air® Bath Model (6636 Model Only)	Each component requires a separate, dedicated GFCI protected circuit
Letter	Description	6232	6636		
-	Drain/Motor Location	Center	Center	Center	Model with components
-	Blower Location	N/A	N/A	Remote	
-	Cutout	N/A	N/A	N/A	GFCI Outlet (60Hz)
-	Total Weight	824 lbs (274 kg)	1227 lbs (557 kg)	1327 lbs (602 kg)	
-	Floor Loading	59.8 lb/ft² (292.0 kg/m²)	74.4 lb/ft² (363.3 kg/m²)	80.4 lb/ft² (392.5 kg/m²)	Blower
-	Operating Gallons (Min/Max)	57 Gal. (216 L) Max.	75 Gal. (284 L) Max.	52 Gal. (192 L) Min. 75 Gal. (284 L) Max.	
-	Product Weight	101 lbs (46 kg)	108 lbs (49 kg)	120 lbs (54 kg)	120V/15A
L	Outer Length	62" (1575 mm)	66" (1676 mm)	66" (1676 mm)	
W	Outer Width	32" (813 mm)	36" (914 mm)	36" (914 mm)	PURE AIR® BATH
H	Overall Height	24.06" (611 mm)	24.06" (611 mm)	24.06" (611 mm)	
A	Overflow Height	17" (432 mm)	17" (432 mm)	17" (432 mm)	Blower
B	Short Edge to Drain Center	31" (787 mm)	33" (838 mm)	33" (838 mm)	
C	Long Edge to Drain Center	17.5" (445 mm)	19.5" (495 mm)	19.5" (495 mm)	120V/15A
D	Drain Shoe Length	12.25" (311 mm)	14.25" (362 mm)	14.25" (362 mm)	
E	Flange Height	N/A	N/A	N/A	
F	Deck Width	5.25" (133 mm)	5.25" (133 mm)	5.25" (133 mm)	
G	Service Access Dimensions	N/A	N/A	N/A	
I	Floor Cutout for Drain	6" x 19" (152 mm x 483 mm)	6" x 21" (152 mm x 533 mm)	6" x 21" (152 mm x 533 mm)	
J	Interior Dimensions (W x L)	41" x 20.5" (1041 mm x 521 mm)	46" x 24.5" (1143 mm x 622 mm)	45" x 24.5" (1143 mm x 622 mm)	
K	Skirt Base Dimensions (L x W)	44" x 25.5" (1118 mm x 648 mm)	48" x 29.5" (1219 mm x 749 mm)	48" x 29.5" (1219 mm x 749 mm)	
M	Backrest Angle	14°	14°	14°	

Key Dimensions

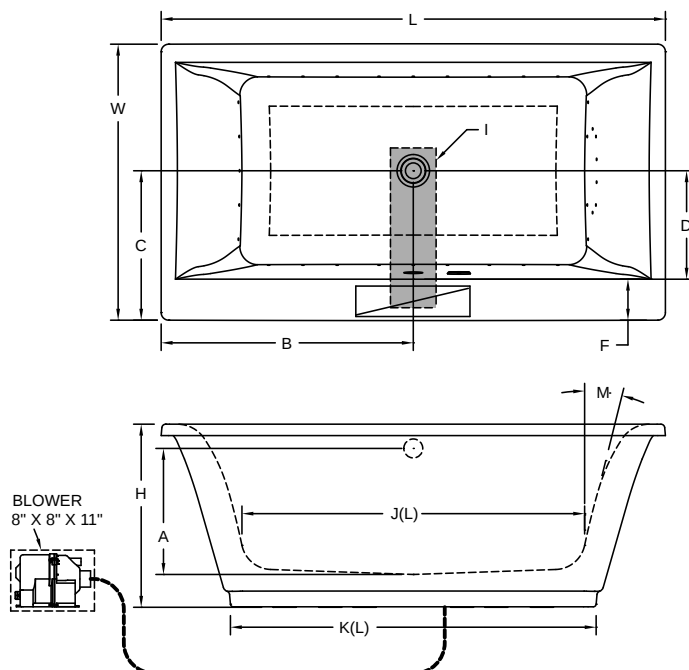

NOTE

The overall dimensions are nominal with a tolerance of +0 and -.25" (6mm).

*Deck width reflects only area indicated on detail.

Centerset faucet mounting area - MU66000 Low-profile Overflow Kit required for installation*

