Page 1 of 2



# Bayvi∈ш™















# Model# 3552575 - Chrome Premier Single-Handle Kitchen Faucet

#### At a Glance:

- Single metal loop handle
- Reliable washerless cartridge
- Provides CEC-compliant flow rate of 1.8 GPM
- Suitable for 3-hole installations (adjustable 6" or 8" on-center)
- 30" nylon supply lines with 3/8" compression connections
- Certified lead-free

# Compliance:

- Complies with ADA (Americans with Disabilities Act)
- Complies with requirements of ASME A112.18.1
- Complies with toxicity requirements of NSF 61-9 and CA Proposition 65
- Meets lead-free requirements of California Health & Safety Code 116875 (AB1953)
- Meets lead-free requirements of NSF 372
- · Complies with requirements of CSA B125

#### Warranty:

- Limited Lifetime Warranty
  - \*Refer to Premier Faucet warranty program for further details and restrictions.

#### **Faucet Features:**

Dimensions (WxHxD) 10-1/8" x 6-7/8" x 9-3/4"

Finish Chrome

Hybrid

Flow Rate 1.8 GPM

Platform

Flow Restriction Type FR (Fixed Restrictor)

Centers|Holes 6" or 8"|3-Hole

Handle Screw 3 mm Hex Key x 6 mm Coarse

Handle Type | Single Loop

Handle Material | Metal

Control | Washerless Ball

Inlet Connections 3/8" Compression

Inlet Type 30" Nylon Supply Lines

Max. Deck Thickness 1"

Deck Plate Material | Metal

Aerator Size Regular (15/16"-27 Male)

Spout Reach 8"

Spout Shape | Oval Tube

Spout Material Brass

Spray Configuration Not Included

Putty Plate Included

Package Size (WxDxH) 14-1/8" x 10-5/8" x 2-1/2"

Package Weight 2.6 lbs.

Case Size (WxDxH) 15-1/8" x 11-3/8" x 8-5/8"

Case Weight 8.8 lbs.

### Listings:

- IAPMO (International Association of Plumbing & Mechanical Officials)
- cUPC (Uniform Plumbing Code-US & CA)
- IAPMO-Certified Lead-Free
- CSA-US (Canadian Standards Association-US & CA)
- DOE (Department of Energy)
- CEC (California Energy Commission)
- Commonwealth of Massachusetts

#### **Optional Accessories:**

- 122006 Sink Strainer, Chrome
- 284462 Soap Dispenser, Chrome

100t.00111.




Page 2 of 2

# **Installation Configurations:**

#### 3-Hole Installation



## **Dimensional Drawing:**

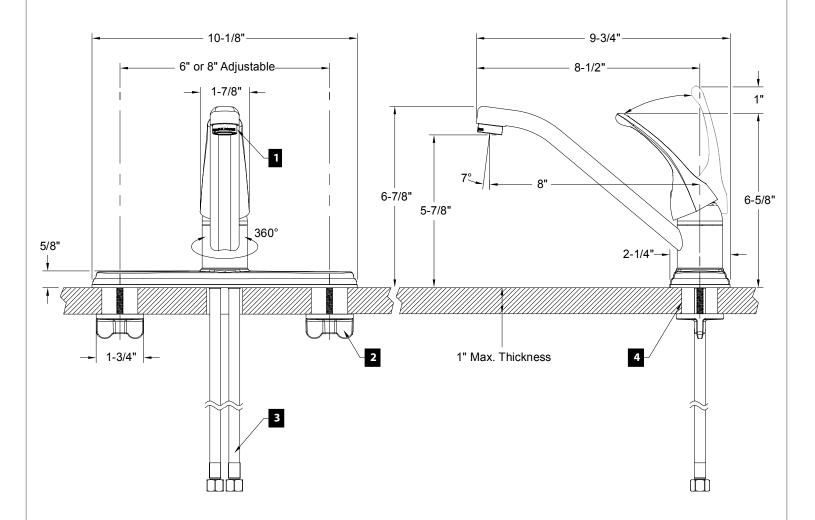

- 1) 15/16"-27 male threaded aerator shell
- 2) 1/4"-20 removable threaded mounting studs allow 6" or 8" on-center installations Plastic wing nuts for easy, tool-free installation (included)
- 3) 30" nylon supply lines with 3/8" compression connections for easy installation
- 4) Fits standard hole openings 1-1/4" to 1-1/2" in diameter



For additional information, contact Premier Faucet at 866-745-4010 or visit our website at www.premierfaucet.com.